


GAS STRAIGHT THREAD PORTS

British standard pipe parallel (55°) conforms to UNI - ISO 228

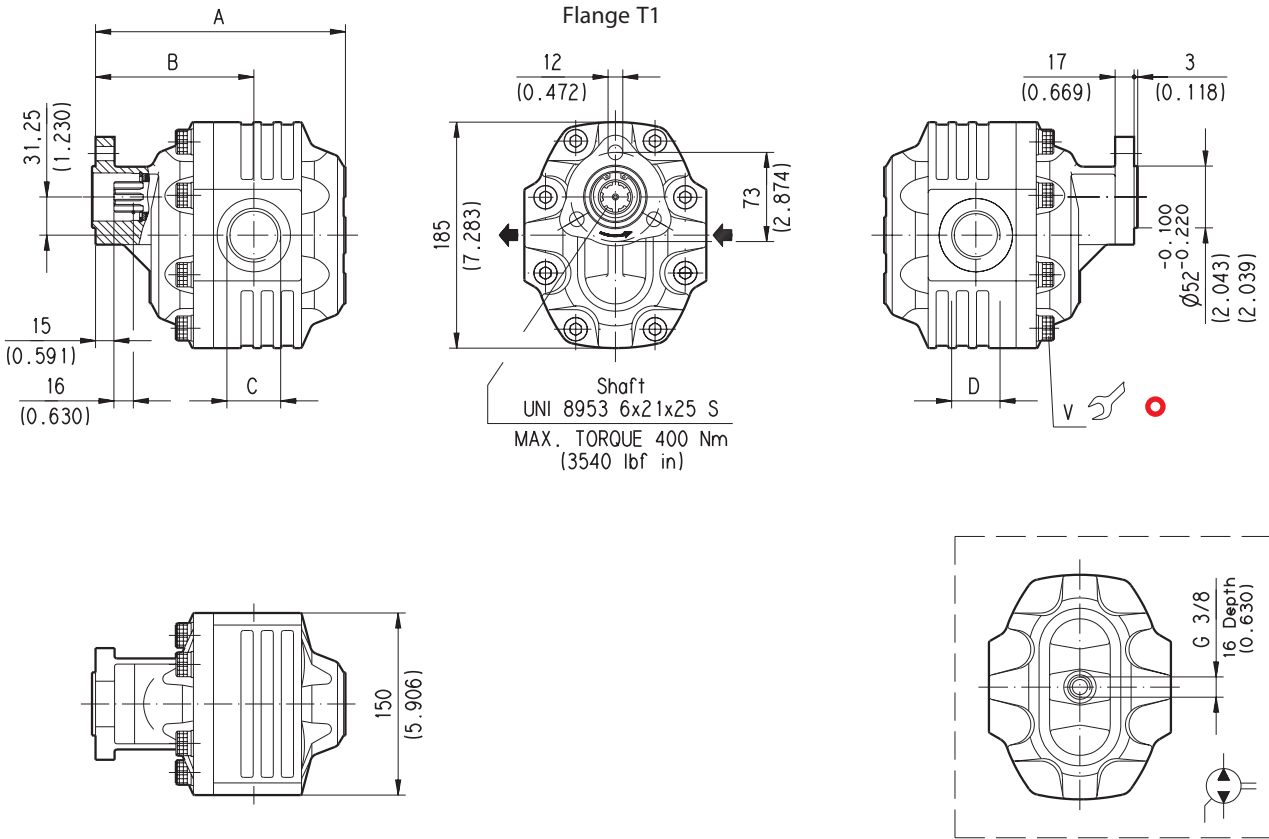

D100-D10/0805

V Tightening torque Nm (lbf·in)

100 <sup>±10</sup> (797 ÷ 974)

Pump type		A	B	C	D	Mass		
		mm (in)	mm (in)	IN	OUT	kg (lbs)		
S D R B	0-19	T1	L GF/GE-N	187,5 (7.382)	119,5 (4.705)	G 1	G 3/4	16,1 (35.50)
			L GG/GF-N	191,5 (7.539)	123,5 (4.862)			16,5 (36.38)
		T2	L GG/GF-N	196,5 (7.736)	128,5 (5.059)	G 1 1/4	G 1	17 (37.49)
				204,5 (8.051)	129,5 (5.098)			18 (39.69)
		L GH/GF-N	213,5 (8.406)	138,5 (5.453)	G 1 1/2	G 1	19,5 (43.00)	
			219,5 (8.642)	144,5 (5.689)			20 (44.10)	

Rotation: S=left - D=right - R=reversible - B=reversible internal drain

How to order:

**FP 40-63 S0 - 19 T1 - L GF/GE - N**

01/08.05