




| | | |
|----------------------|--------------------|----------------|
| Tipping Valve | | Ref. DTCA13001 |
| DT | Open Circuit 130 L | |

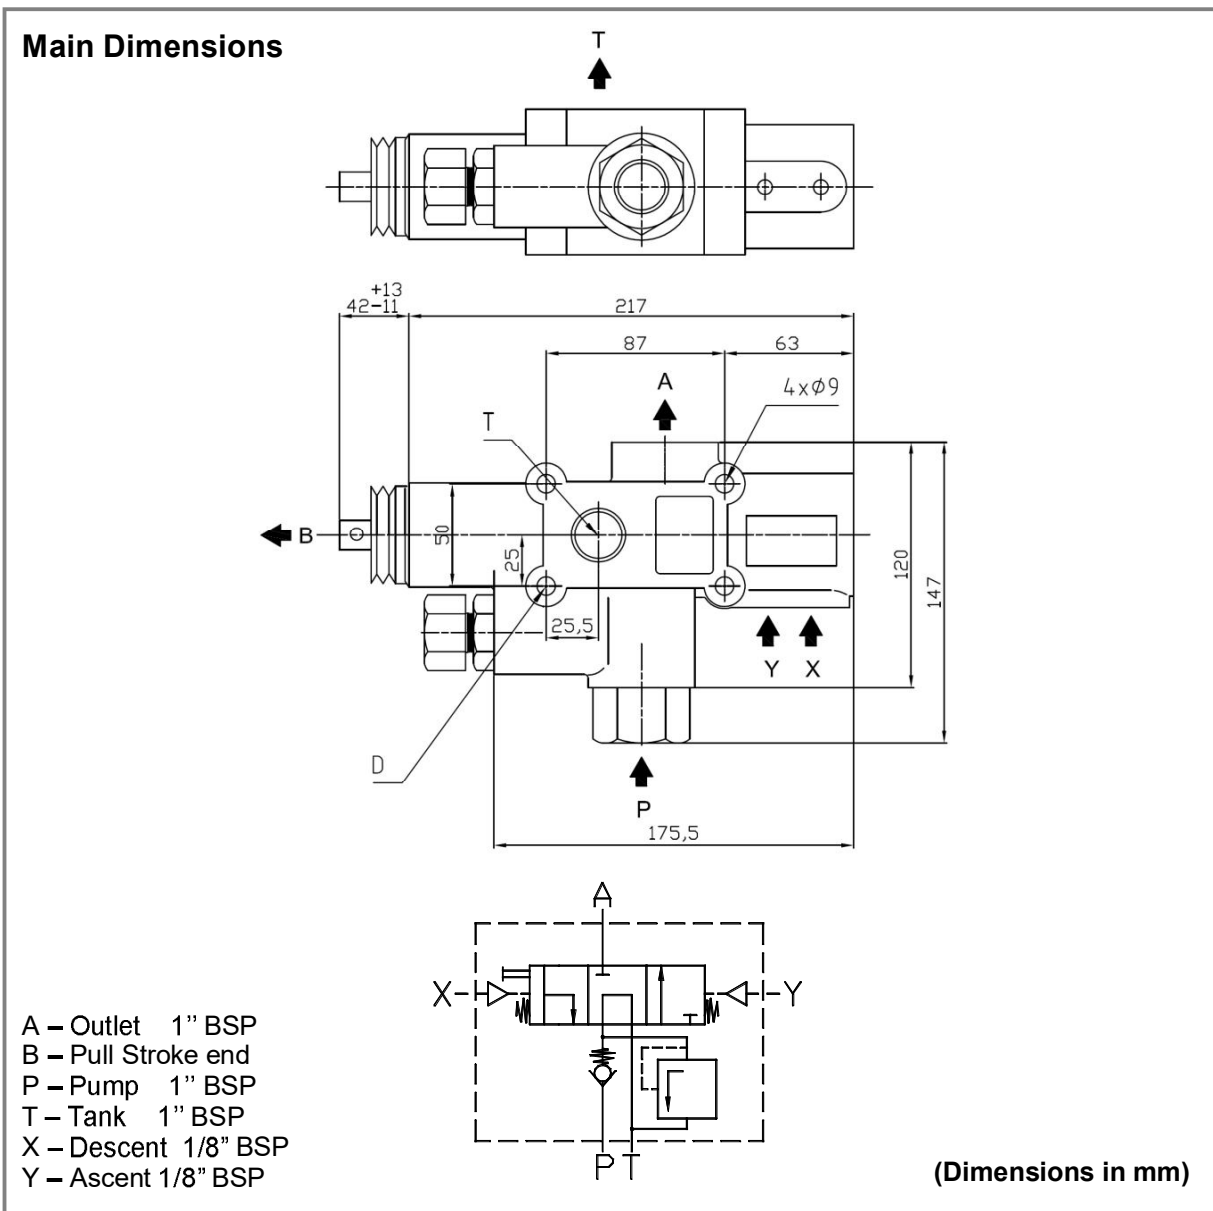

| Main Data | |
|---------------------------------|------------------|
| Maximum pressure (Bar) | 350 |
| Operating pressure (Bar) | up to 300 |
| Flow rate (l/min) | 130 |
| Weight (kg) | 5.2 |

- Notes:**
- ✓ This tipping valve can be used in progressive descent with our air commands ABCD.
 - ✓ Tighten the tipping valve with only three bolts. Do not use the "D" hole. Screw the three bolts with a max. tightening torque of 20 N.m (soft tightening).

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown



CTIDTCA13001 1504-3