




Tipping Valve		Ref. VVLR130 VVP130
VV	Close Circuit 130 L	

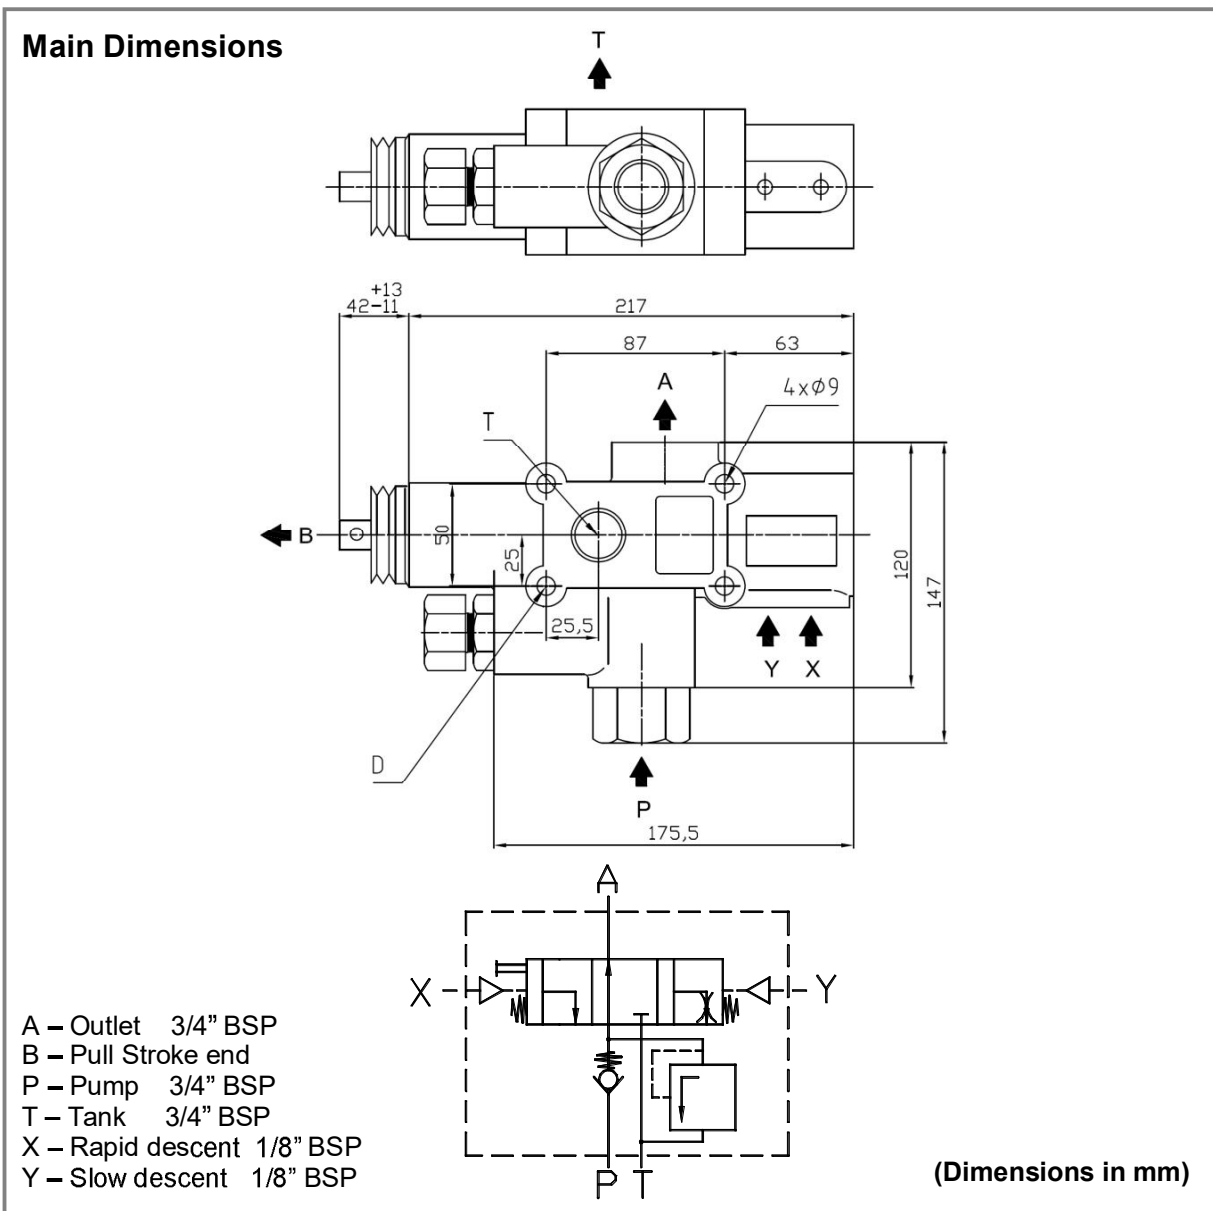

Main Data	
Maximum pressure (Bar)	350
Operating pressure (Bar)	up to 300
Flow rate (l/min)	130
Weight (kg)	5.2

- Notes:**
- ✓ This tipping valve can be used in progressive descent with our air commands ABCD.
 - ✓ Tighten the tipping valve with only three bolts. Do not use the "D" hole. Screw the three bolts with a max. tightening torque of 20 N.m (soft tightening).

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown

