
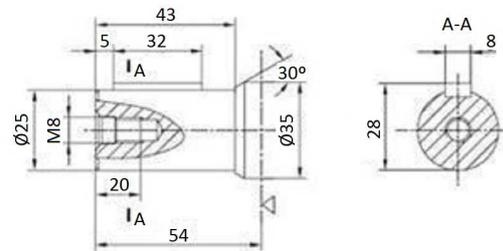
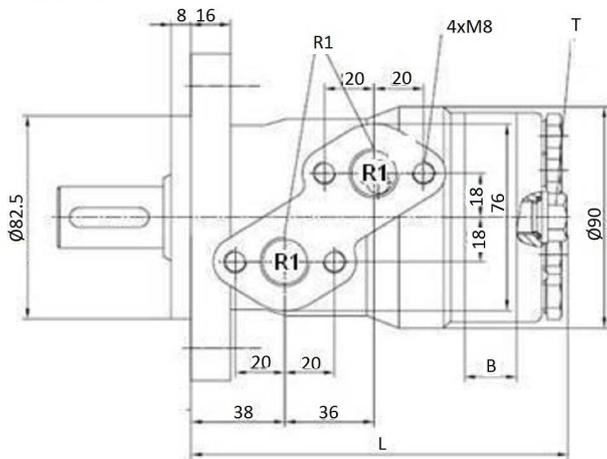
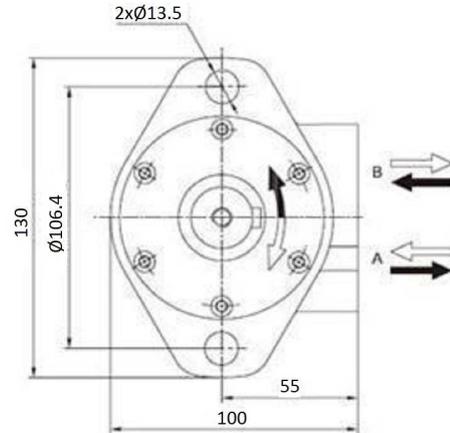



# HMP Hydraulic motors

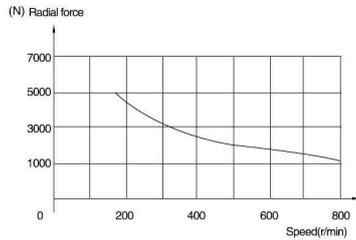

**Shaft:** cylindrical shaft, diameter 25 mm

**Max. flow interm.:** MOMP50 =60 (l/min); Others=75 (l/min)

**T:** drainage line, thread 1/4"

**(Power in kW)**

**(Torque in daN.m)**

Part n°	R1	Max. flow (l/min)	Max. press. cont.	Max. press. interm.	Max. Peak press.	cm <sup>3</sup> / rev	R.P.M. cont.	R.P.M. int.	Max. torque cont.	Max. torque peak	Max. power cont.	Max. flow cont.	B	L
<b>HMP-080-C25/AG</b>	1/2" BSP	60	140	175	210	80	760	940	14,9	21,9	10,1	60	11	145
<b>HMP-320-C25-AGE</b>	1/2" BSP	60	80	115	160	315	190	235	34,2	68,4	5,6	60	42	176
<b>HMP-400-C25/AG</b>	1/2" BSP	60	65	90	140	400	150	190	34,8	68,8	4,6	60	52	186

\*\*\* Review attached PDF\*\*\*

\*Intermittent operation rating applies to 6 seconds of every minute.

\*Peak load rating applies to 0.6 seconds of every minute.